MODIFICATION OF SURFACE MODIFIER

Publication number: JP2508554 (B2)
Publication date: 1996-06-19
Inventor(s): KADOWAKI SATORU, ; SUZUKI MAKOTO, ; OKAMOTO KUNIO
Applicant(s): NIPPONDENSO CO LTD, ; NIPPON DENSO CO
Classification:
- international: ***C08K5/54; C08K5/55; C08K9/00; C08K9/02; C08K9/06; C09D5/00; C09D183/00; C09J5/00; C09J5/02; D06M13/02; D06M13/50; D06M13/51; D06M13/513; D06M23/00;*** *D06M101/00; D06M101/40;* **C08K5/00; C08K9/00; C09D5/00; C09D183/00; C09J5/00; C09J5/02; D06M13/00; D06M23/00;** (IPC1-7): C09D183/00; C08K5/54; C08K9/00; C08K9/06; C09D5/00; C09J5/00
- European:
Application number: JP19910142486 19910517
Priority number(s): JP19910142486 19910517

Also published as:
JP4342746 (A)

Cited documents:
JP61057663 (A)
JP3072551 (A)
JP61275365 (A)
JP2018463 (A)
JP64000126 (A)
more >>

Abstract of **JP 4342746 (A)**

PURPOSE:To obtain a surface modifying component having excellent surface treating ability free from formation of by-product during surface treatment. CONSTITUTION:For example, a silane coupling agent, a surface improving agent, is hydrolyzed with water, an alcohol as a by-product is removed from the reaction solution to give a surface modifying component. The surface modifying component is used as an improved surface modifier.

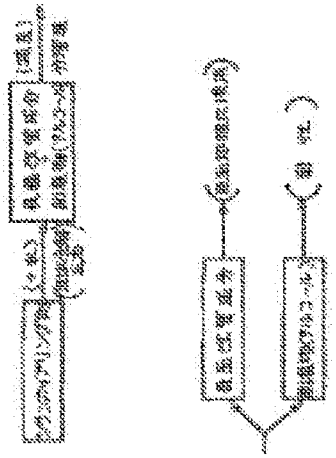

Data supplied from the ***esp@cenet*** database — Worldwide